


Short Link Chain Grade 30 - Generally to DIN 766

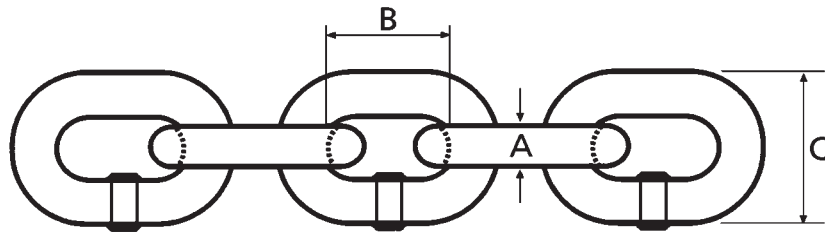

Short Link Chain - Self Colour

Part Code	Description	Diameter	Internal Diameter		Kg/m	Drum Quantity	MBL kN
			I/L	O/W			
1.060.G30	6mm Short Link	6mm	18.5mm	20mm	0.80	500	16
1.080.G30	8mm Short Link	8mm	24mm	28mm	1.40	350	32
1.100.G30	10mm Short Link	10mm	30mm	34mm	2.20	250	50
1.120.G30	12mm Short Link	12mm	36mm	40mm	3.20	150	72
1.160.G30	16mm Short Link	16mm	45mm	54mm	5.70	100	125
1.200.G30	20mm Short Link	20mm	60mm	68mm	9.50	60	200

Short Link Chain - Galvanised

Part Code	Description	Diameter	Internal Diameter		Kg/m	Drum Quantity	MBL kN
			I/L	O/W			
2.060.G30	6mm Short Link	6mm	18.5mm	20mm	0.85	500	16
2.080.G30	8mm Short Link	8mm	24mm	28mm	1.45	350	32
2.100.G30	10mm Short Link	10mm	30mm	34mm	2.25	250	50
2.120.G30	12mm Short Link	12mm	36mm	40mm	3.35	150	72
2.160.G30	16mm Short Link	16mm	45mm	54mm	5.90	100	125
2.200.G30	20mm Short Link	20mm	60mm	68mm	9.50	60	200

Short Link Chain Grade 40

Short Link Chain - Self Colour

Part Code	Description	Diameter	Internal Diameter		Kg/m	Drum Quantity	MBL kN
			I/L	O/W			
1.060.G40	6mm Short Link	6.3mm	19mm	22.1mm	0.88	500	25
1.080.G40	8mm Short Link	8mm	24mm	28mm	1.40	350	39
1.100.G40	10mm Short Link	10mm	30mm	35mm	2.20	250	62
1.130.G40	13mm Short Link	13mm	39mm	46mm	3.80	150	106
1.160.G40	16mm Short Link	16mm	48mm	56mm	5.70	100	160
1.200.G40	20mm Short Link	20mm	60mm	70mm	9.00	60	250
1.220.G40	22mm Short Link	22mm	66mm	77mm	10.8	50	305
1.260.G40	26mm Short Link	26mm	78mm	91mm	15.1	30	420