



## Grade 4(M) Short Link Chain to BS EN818-3


**Grade 4 (M) Short Link Chain** - Finish: Self Colour Test: Batch Tested and Certified

Specially manufactured for William Hackett from high tensile low carbon steel material, this chain is manufactured on automatic chain making machines with flash butt welded joints. All sizes of chain are proof load tested at the end of the manufacturing process. All chain is embossed at every 20th Link or 1m intervals with a batch number and manufacturers' mark.

Although not commonly used nowadays, Gr.4 chain still plays an important role for the construction of chain sling systems where conventional Gr.8 and Gr.10 chain sling systems can not be used due to extreme environmental conditions.

Chain diameter range: 6mm – 32mm, available in both self colour and hot dip galvanized finishes.

Gr.4 chain sling systems and bespoke Gr.4 assemblies can be manufactured on application. Supplied in full drum lengths or cut to specific customer requirements

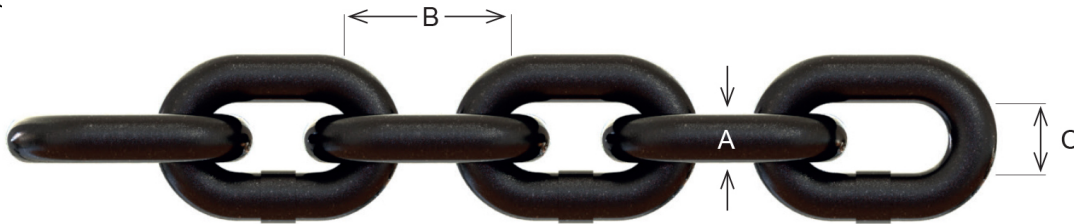

Part Code	Chain Size (mm)	A (mm)	B (mm)	C (mm)	W.L.L. (t)	M.B.L. (t)	Meter Per Drum	Weight Per M (Kg)
1.060.G40.1	6	6	18	9	500 Kg	2.0	500	0.78
1.070.G40.1	7	7	21	10.5	750 Kg	3.0	350	1.10
1.080.G40.1	8	8	24	12	1.00	4.0	350	1.40
1.100.G40.1	10	10	30	15	1.60	6.4	250	2.20
1.130.G40.1	13	13	39	19	2.65	10.6	150	3.80
1.160.G40.1	16	16	48	24	4.00	16.0	100	5.60
1.200.G40.1	20	20	60	30	6.30	25.2	50	8.50
1.220.G40.1	22	22	66	33	7.50	30.0	50	10.70
1.260.G40.1	26	26	78	39	10.00	40.0	50	15.00
1.320.G40.1	32	32	96	48	16.00	64.0	25	22.75

