



William Hackett

www.williamhackett.co.uk

WH C4 Chain Hoist

The William Hackett WH C4 chain hoist meets and exceeds the requirements of the following international standards:

British Standard BS EN13157:2004 + A1:2009

American Standard ASME B30.16-2014

Australian Standard AS1418.2-1997

South African Standard SANS 1594:2007

NORSOK R-002: 2017.


The design and specification of the William Hackett WH C4 chain hoist includes:

- **WORKING LOAD LIMIT RANGE:** 500kg to 50 tonnes.
- **LIGHT LOAD CAPABILITY:** tested and certified at 2% of the chain hoist rated capacity.
- **TWIN PAWL:** fitted as standard.
- **SAFETY FACTOR:** 4:1.
- **SAFETY LATCHES:** hooks are fitted with heavy duty cast steel latches. The latch and hook tip are integrated creating a strong and robust hook closure.
- **HOOK OVERLOAD AND TRACEABILITY MARKS:** hooks have overload indicator marks either side of the hook throat (500kg to 10t). Both top and bottom hooks are embossed with a batch code, manufacturer's mark and the working load limit for full traceability and compliance to international standards.
- **HAND CHAIN JOINER:** a unique hand chain joiner is used as a quick and secure method of joining the hand chain.
- **HOOK HOUSING:** secured with socket head cap screws/hex head bolts and nyloc insert locking nuts to allow full inspection.
- **FLEETING/CROSS HAULING:** independently tested (test report 2550-7615) for fleeting or cross hauling applications up to 45° from the vertical without deration of the WLL.
- **LOAD CHAIN:** fitted with load chain that fully complies with international standard BS EN818-7 Grade T (8).
- **TEMPERATURE RANGE:** -20°C to +120°C
- **PROOF TESTED:** 500kg to 10 tonne hoists are proof tested to 1.5 times the Working Load Limit. 15 tonne to 50 tonne hoists are proof tested to 1.25 times the Working Load Limit.
- **OVERLOAD LIMITER:** available as an option upon request.
- **BOTTOM HOOK:** available with ball bearing adaptors as an option upon request.
- **MANUFACTURED AND PROOF TESTED** in the U.K.




Specifications

Single Fall

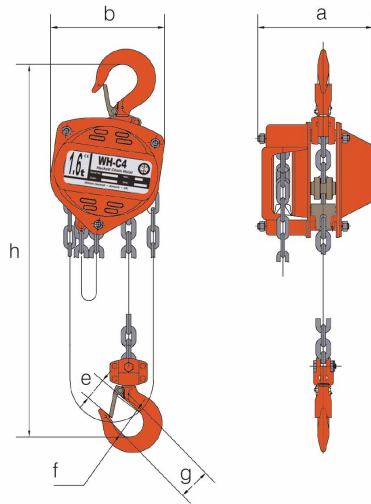

Multi Fall

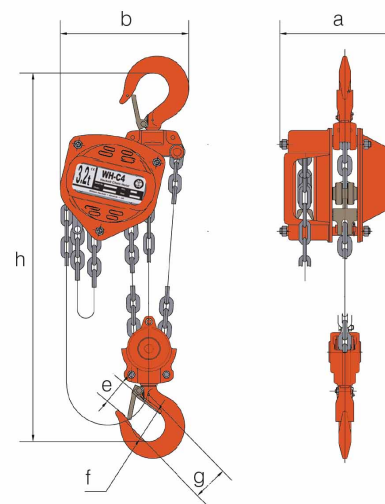

Part Code	WLL tonnes	No. of Falls	Load Chain mm	Hand Chain mm	Standard Lift m	a mm	b mm	e mm	f mm	g mm	h mm	Mass kg 3m HOL	Extra Weight per m kg
022.053	0.50	1	5 x 15	5 x 25	3	125	130	20.5	40	42.5	305	7.80	1.44
022.103	1.00	1	6 x 18	5 x 25	3	134	155	25.5	40	49.0	350	11.10	1.71
022.163	1.60	1	8 x 24	5 x 25	3	151	173	30.0	40	51.5	390	15.80	2.24
022.203	2.00	1	8 x 24	5 x 25	3	157	185	30.0	44	54.5	410	16.80	2.24
022.32D03	3.20	2	8 x 24	5 x 25	3	157	235	37.5	48	61.0	495	24.20	3.58
022.503	5.00	2	10 x 30	5 x 25	3	180	262	43.0	60	85.0	635	38.40	5.24
022.753	7.50	3	10 x 30	5 x 25	3	180	373	53.0	83	89.0	775	58.20	7.51
022.1003	10.00	4	10 x 30	5 x 25	3	180	365	53.0	83	89.0	815	68.90	9.58
022/1503	15.00	6	10 x 30	5 x 25	3	210	406	80.0	108	-	1000	116.70	13.92
022/2003	20.00	8	10 x 30	5 x 25	3	225	550	80.0	108	-	1100	149.50	19.16
022/3003	30.00	12	10 x 30	5 x 25	3	460	800	112.0*	140	-	1550	515.00	27.84
022/5003	50.00	20	10 x 30	5 x 25	3	580	840	140.0*	180	-	2000	750.00	45.20

*Measurement without latch



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU
Email: liftingsales@williamhackett.co.uk Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204



Web: www.williamhackett.co.uk

Better connected with William Hackett