




WH CP-C4 Combined Chain Hoist and Trolleys

The William Hackett Corrosion Protected Combined Chain Hoist with Push and Geared Trolleys meet and exceed the requirements of international standard and British Standard BS EN 13157:2004 + A1:2009.

Specifications

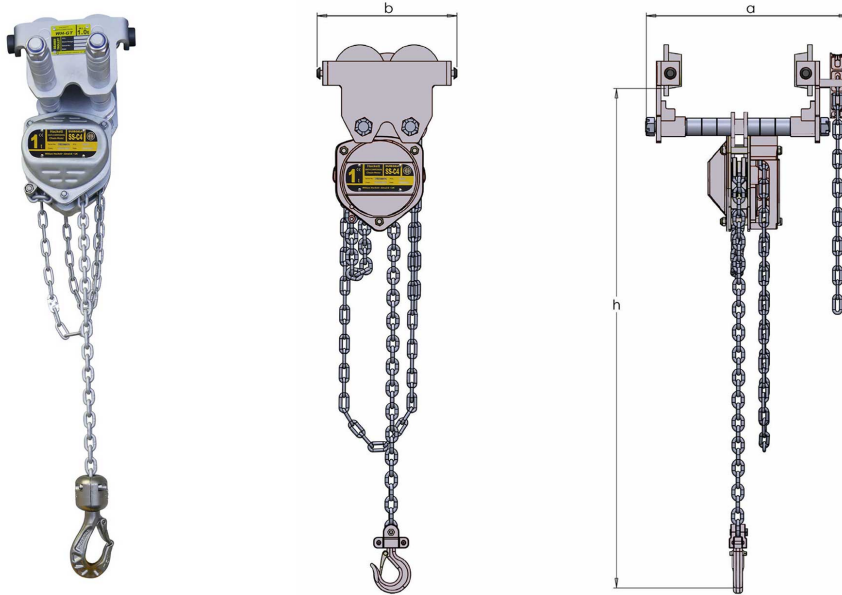

CP-C4 Combined Chain Hoist and Push Trolley

Part Code	WLL tonnes	No. of Falls	Beam Range 1 mm	Beam Range 2 mm	a max mm	b mm	h mm	Mass kg Range 1
066.050.CP	0.50	1	70 - 203	-	294	190	295	15.00
066.100.CP	1.00	1	88 - 203	88 - 305	311	206	340	22.00
066.200.CP	2.00	1	88 - 203	88 - 305	324	246	437	34.00

CP-C4 Combined Chain Hoist and Geared Trolley

Part Code	WLL tonnes	No. of Falls	Beam Range 1 mm	Beam Range 2 mm	a max mm	b mm	h mm	Mass kg Range 1
067.050.CP	0.50	1	70 - 203	-	232	190	295	15.60
067.100.CP	1.00	1	88 - 203	88 - 305	332	206	340	25.50
067.200.CP	2.00	1	88 - 203	88 - 305	341	246	437	37.50

