



William Hackett

www.williamhackett.co.uk

WH C4 Combined Chain Hoist and Trolleys

The William Hackett WH C4 Combined Hoist and Trolleys meet and exceed the requirements of international standard and British Standard BS EN 13157:2004 + A1:2009

This high quality trolley range is precision engineered in capacities from 500kg to 5 tonne.

Enabling exact positioning or easy traversing of large loads incorporating manual hoists, the Hackett series combined block and trolleys can be supplied to suit various track widths with Beam Range 1 and the extended Beam Range 2.


It has been designed so that the bottom of the hand chain loop is 500mm from ground level.

The runners (trolley wheels) are precision machined and they rotate on maintenance sealed ball bearings.

All Hackett combined chain block and trolleys are fitted with anti-jump bars and rubber end stops as standard.



Specifications

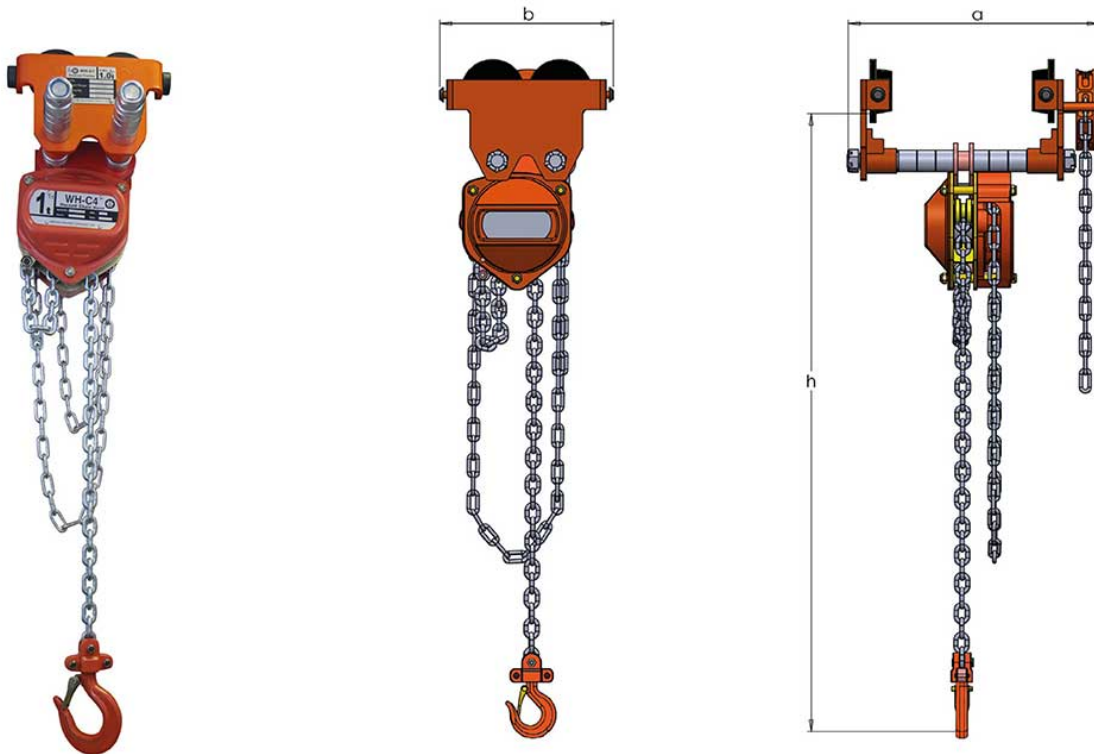

WH-C4 Combined Chain Hoist and Push Trolley

Part Code	WLL tonnes	No.of Falls	Beam Range 1 mm	Beam Range 2 mm	a max mm	b mm	h mm	Mass kg
066.050	0.50	1	70 - 203	-	294	190	295	15.00
066.100	1.00	1	88 - 203	88 - 305	311	206	340	22.00
066.200	2.00	1	88 - 203	88 - 305	324	246	437	34.00
066.320	3.20	2	100 - 203	100 - 305	348	300	493	53.00
066.500	5.00	2	114 - 203	114 - 305	369	336	573	80.00

WH-C4 Combined Chain Hoist and Geared Trolley

Part Code	WLL tonnes	No.of Falls	Beam Range 1 mm	Beam Range 2 mm	a mm	b mm	h mm	Mass kg
067.050	0.50	1	70 - 203	-	232	190	295	15.60
067.100	1.00	1	88 - 203	88 - 305	332	206	340	25.50
067.200	2.00	1	88 - 203	88 - 305	341	246	437	37.50
067.320	3.20	2	100 - 203	100 - 305	359	300	493	57.00
067.500	5.00	2	114 - 203	114 - 305	366	336	573	83.00



William Hackett

William Hackett Lifting Products Ltd Oak Drive, Lionheart Enterprise Park, Alnwick, Northumberland NE66 2EU
 Email: liftingsales@williamhackett.co.uk Tel: +44 (0)1665 604200 Fax: +44 (0)1665 604204

