


## Yoke Grade 8 Component Connector BS EN1677-1+2

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

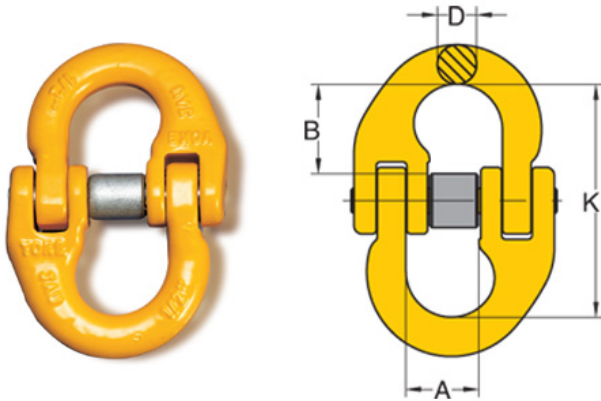

### METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	K mm	WLL tonnes	Box Quantity	Mass Kg
8-015-07	7, 8	18	22	9	57	2.00	150	0.20
8-015-10	10	25	26	11	68	3.15	50	0.30
8-015-13	13	30	35	16	91	5.30	35	0.70
8-015-16	16	36	38	19	100	8.00	20	1.10
8-015-20	18, 20	42	46	22	122	12.50	10	1.90
8-015-22	22	49	59	24	152	15.00	6	3.00
8-015-26	26	55	62	30	162	21.20	3	5.00
8-015-32	32	69	79	36	202	31.50	2	9.00

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	K inch	WLL lbs	Box Quantity	Mass lbs
8-015-07	1/4 - 5/16	0.71	0.89	0.35	2.25	4500	150	0.40
8-015-10	3/8	0.99	1.06	0.50	2.68	7100	50	0.70
8-015-13	1/2	1.19	1.38	0.62	3.58	12000	35	1.50
8-015-16	5/8	1.42	1.51	0.75	3.94	18100	20	2.40
8-015-20	3/4	1.65	1.81	0.87	4.80	28300	10	4.20
8-015-22	7/8	1.93	2.32	0.94	5.98	34200	6	6.60
8-015-26	1	2.17	2.44	1.19	6.38	47700	3	10.40
8-015-32	1-1/4	2.72	3.11	1.42	7.96	72300	2	19.40