


## Yoke Grade 10 Eye Grab Hook EN1677-1+2

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

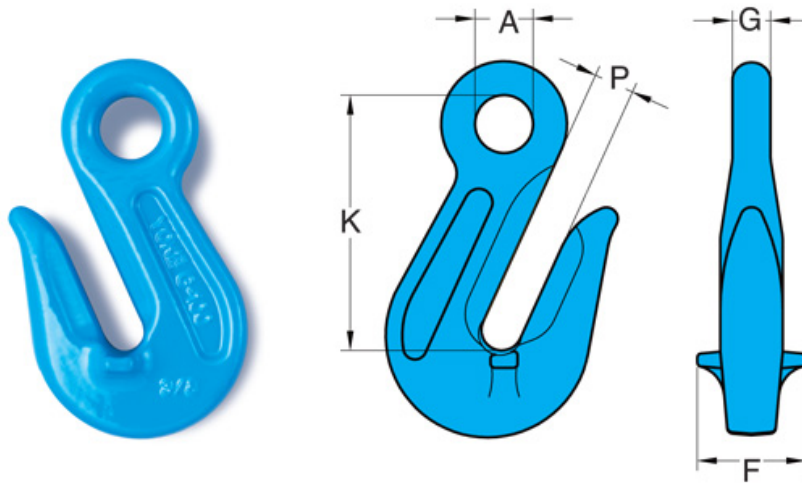

### METRIC SPECIFICATIONS

| Part Code | Chain Size mm | A mm | F mm | G mm | K mm | P mm | WLL tonnes | Box Quantity | Mass Kg |
|-----------|---------------|------|------|------|------|------|------------|--------------|---------|
| X-041-06  | 6             | 13   | 26   | 8    | 50   | 8    | 1.4        | 100          | 0.2     |
| X-041-07  | 7,8           | 16   | 30   | 9    | 62   | 10   | 2.5        | 80           | 0.3     |
| X-041-10  | 10            | 20   | 40   | 13   | 82   | 13   | 4.0        | 40           | 0.6     |
| X-041-13  | 13            | 26   | 52   | 16   | 107  | 17   | 6.7        | 12           | 1.4     |
| X-041-16  | 16            | 30   | 57   | 20   | 132  | 21   | 10.0       | 10           | 2.4     |
| X-041-20  | 20            | 38   | 73   | 24   | 147  | 23   | 16.0       | 6            | 4.0     |
| X-041-22  | 22            | 38   | 70   | 26   | 164  | 26   | 19.0       | 5            | 5.0     |
| X-041-26  | 26            | 50   | 100  | 32   | 207  | 33   | 26.5       | 2            | 10.1    |

### IMPERIAL SPECIFICATIONS

| Part Code | Chain Size inch | A inch | F inch | G inch | K inch | P inch | WLL lbs | Box Quantity | Mass lbs |
|-----------|-----------------|--------|--------|--------|--------|--------|---------|--------------|----------|
| X-041-06  | 1/4             | 0.51   | 1.02   | 0.31   | 1.97   | 0.31   | 3000    | 100          | 0.44     |
| X-041-07  | 5/16            | 0.63   | 1.18   | 0.35   | 2.40   | 0.39   | 5500    | 80           | 0.66     |
| X-041-10  | 3/8             | 0.78   | 1.57   | 0.51   | 3.23   | 0.51   | 8800    | 40           | 1.32     |
| X-041-13  | 1/2             | 1.02   | 2.05   | 0.69   | 4.21   | 0.67   | 14700   | 12           | 3.08     |
| X-041-16  | 5/8             | 1.81   | 2.24   | 0.78   | 5.19   | 0.82   | 22000   | 10           | 5.29     |
| X-041-20  | 3/4             | 1.49   | 2.87   | 0.94   | 5.78   | 0.91   | 35200   | 6            | 8.81     |
| X-041-22  | 7/8             | 1.49   | 2.75   | 1.02   | 6.45   | 1.02   | 41800   | 5            | 11.02    |
| X-041-26  | 1               | 1.97   | 3.94   | 1.29   | 8.14   | 1.29   | 58400   | 2            | 22.26    |