


## Yoke Grade 8 Eye Sling Hook with Latch BS EN1677-1+2

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

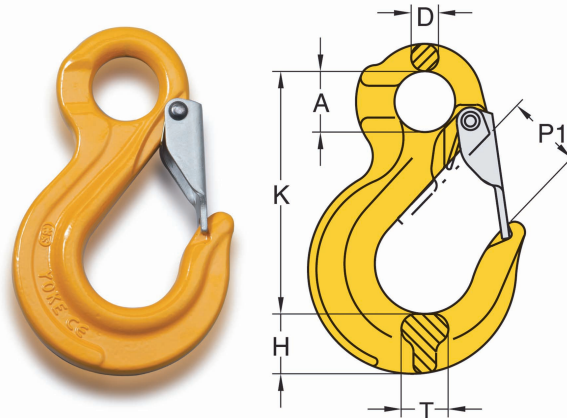

### METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	D mm	H mm	K mm	P1 mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-044/S-07	7, 8	25	11	23	98	28	20	2.00	30	0.50
8-044/S-10	10	32	14	31	121	36	23	3.15	20	1.00
8-044/S-13	13	40	18	38	152	40	28	5.30	10	1.70
8-044/S-16	16	50	22	47	184	44	32	8.00	6	3.20
8-044/S-20	20	60	26	48	218	45	43	12.50	4	5.50
8-044/S-22	22	50	31	62	244	73	50	15.00	2	9.00
8-044/S-26	26	64	35	80	279	77	60	21.20	2	13.50
8-044/S-32	32	88	40	86	352	114	65	31.50	1	20.00

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	D inch	H inch	K inch	P1 inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-044/S-07	1/4 - 5/16	0.98	0.43	0.91	3.86	1.18	0.75	4500	30	1.10
8-044/S-10	3/8	1.26	0.59	1.22	4.76	1.42	0.91	7100	20	2.00
8-044/S-13	1/2	1.57	0.71	1.50	5.98	1.69	1.10	12000	10	4.20
8-044/S-16	5/8	1.97	0.87	1.85	7.20	1.85	1.29	18100	6	7.10
8-044/S-20	3/4	2.36	1.06	1.89	8.54	1.77	1.69	28300	4	12.60
8-044/S-22	7/8	2.01	1.26	2.44	9.45	2.75	1.97	34200	2	20.10
8-044/S-26	1	2.60	1.34	3.15	10.63	3.15	2.36	47700	2	30.00
8-044/S-32	1-1/4	3.50	1.57	3.39	13.86	4.49	2.56	72300	1	41.20