


Yoke Grade 8 Swivel Sling Hook with Ball Bearing BS EN1677-1+2

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

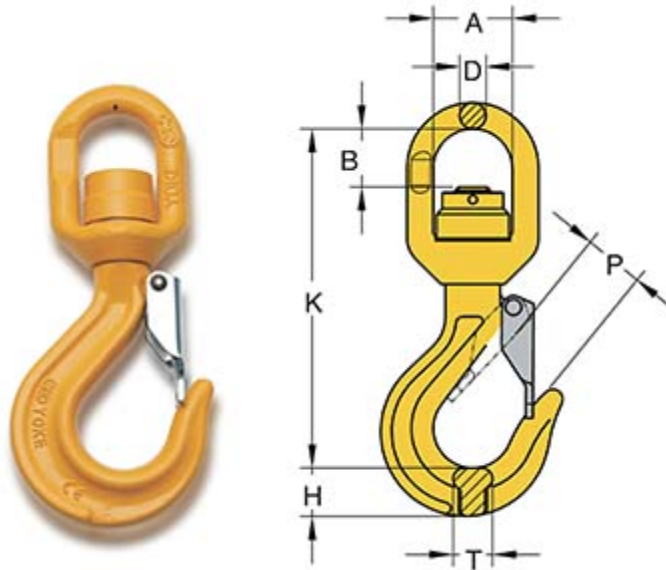

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-049N-07	7, 8	36	27	12	22	155	26	18	2.00	20	0.90
8-049N-10	10	41	35	16	29	189	36	23	3.15	8	1.60
8-049N-13	13	46	40	21	35	233	42	28	5.30	6	3.40
8-049N-16	16	60	50	22	44	280	50	35	8.00	4	5.10
8-049N-20	20	74	82	25	65	356	56	49	12.50	2	9.50

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-049N-07	1/4 - 5/16	1.42	1.06	0.51	0.87	6.10	1.02	0.71	4500	20	2.00
8-049N-10	3/8	1.63	1.37	0.62	1.14	7.44	1.42	0.91	7100	8	3.50
8-049N-13	1/2	1.81	1.57	0.83	1.38	9.17	1.65	1.10	12000	6	7.50
8-049N-16	5/8	2.36	1.97	0.91	1.73	11.02	1.97	1.38	18100	4	11.70
8-049N-20	3/4	2.91	3.23	1.02	2.56	14.00	2.20	1.91	28300	2	20.50

This hook is designed to fully swivel while in use lifting a load