


Yoke Grade 8 Eye Self Locking Hook BS EN 1677-1+2

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

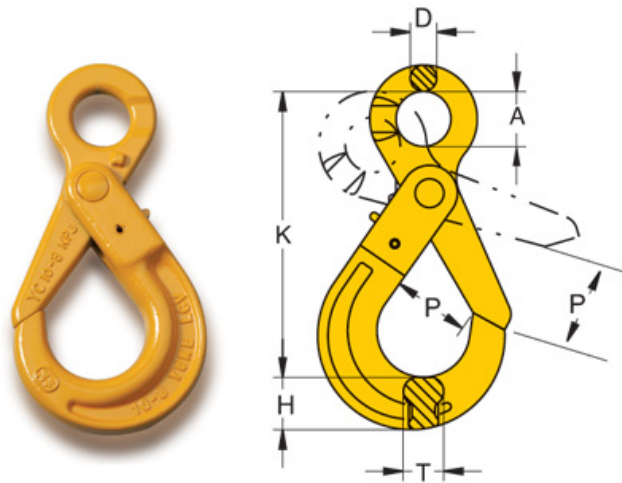

METRIC SPECIFICATIONS

Part Code	Chain Size	A mm	D mm	H mm	K mm	P mm	T mm	WLL tonnes	Box Quantity	Mass Kg
8-025-07	7, 8	25	11	24	136	34	20	2.00	20	0.80
8-025-10	10	32	13	30	167	44	26	3.15	12	1.40
8-025-13	13	40	16	39	207	52	30	5.30	6	3.00
8-025-16	16	52	21	49	252	60	36	8.00	4	5.80
8-025-20	20	64	23	62	282	90	48	12.50	2	8.50
8-025-22	22	70	24	63	319	80	49	15.00	2	12.50
8-025-26	26	80	25	69	343	99	56	21.20	1	14.00
8-025-28	28	90	28	81	401	120	63	25.00	1	26.00

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	D inch	H inch	K inch	P inch	T inch	WLL lbs	Box Quantity	Mass lbs
8-025-07	1/4 - 5/16	0.98	0.44	0.94	5.35	1.34	0.79	4500	20	1.80
8-025-10	3/8	1.26	0.51	1.19	6.57	1.77	1.02	7100	12	3.10
8-025-13	1/2	1.56	0.62	1.57	8.15	2.13	1.19	12000	6	6.40
8-025-16	5/8	2.05	0.83	1.93	9.92	2.44	1.42	18100	4	12.60
8-025-20	3/4	2.52	0.91	2.36	11.10	3.54	1.91	28300	2	18.70
8-025-22	7/8	2.75	0.94	2.48	12.56	3.14	2.12	34200	2	27.60
8-025-26	1	3.15	0.98	2.72	13.50	3.90	2.20	47700	1	32.00
8-025-28	1-1/8	3.54	1.10	3.18	15.80	4.72	2.48	55100	1	54.90