
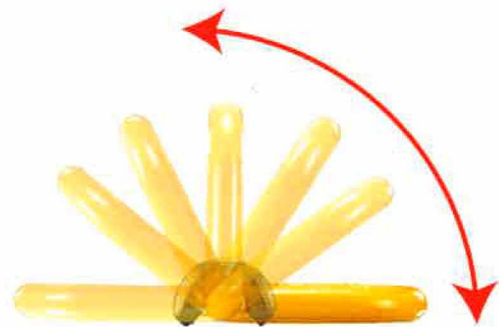



Yoke Grade 8 Weld-on Lifting Point BS EN 1677-1+2

- Designed with spring, stop at any angle.
- Pivots through 180°.
- Manufactured from forged alloy steel, quenched and tempered.
- Load rated parts are 100% magnaflux crack detected.
- Individual forged parts are traceable to Test Certification.
- Design Factor 4 : 1.
- WLL forged onto each product for quick and easy identification.
- Lugs designed to assist the welding process.
- A protected spring keeps the load ring in a required position. The parts are connected in such a way that they remain captive. The spring also reduces noise caused by vibrations.

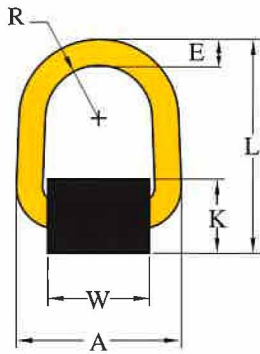

Stop at Any Angle

METRIC SPECIFICATIONS

Part Code	WLL tonnes	A mm	D mm	E mm	F mm	H mm	K mm	L mm	R mm	W mm	Mass Kg
8-057-10T	10.0	146	20	30	54	99.5	69	188	40	75	3.1
8-0573-20	20.0	187	25	38	70	116.0	93	234	50	91	6.5

IMPERIAL SPECIFICATIONS

Part Code	WLL lbs	A inch	D inch	E inch	F inch	H inch	K inch	L inch	R inch	W inch	Mass lbs
8-057-10T	22000	5.7	0.7	1.1	2.1	3.9	2.7	7.4	1.6	2.9	6.8

8-0573-20	44000	7.3	0.9	1.5	2.7	4.5	3.6	9.2	1.9	3.5	14.3
-----------	-------	-----	-----	-----	-----	-----	-----	-----	-----	-----	------

Email: Info@towne.co.uk • www.towne.co.uk