


Yoke Grade 8 Eye Grab Hook BS EN1677-1+2

All Grade 8 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

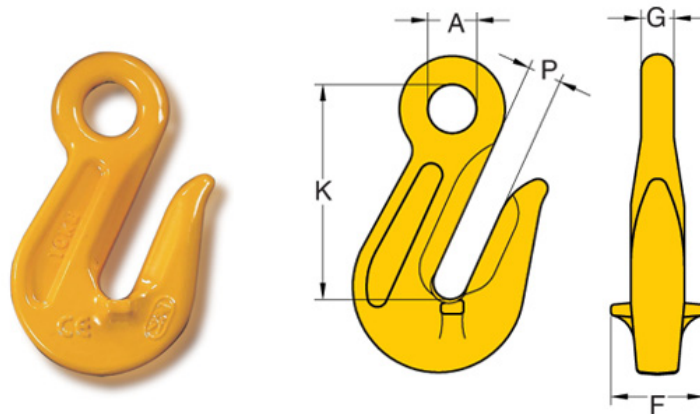

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	F mm	G mm	K mm	P mm	WLL tonnes	Box Quantity	Mass Kg
8-041-07	7/8	15	30	9	60	10	2.00	80	0.30
8-041-10	10	20	41	13	84	13	3.15	40	0.60
8-041-13	13	25	52	15	102	16	5.30	12	1.40
8-041-16	16	30	57	20	114	20	8.00	10	2.30
8-041-20	20	36	73	24	132	23	12.50	6	3.90
8-041-22	22	38	70	26	165	26	15.00	5	4.70
8-041-26	26	41	100	32	187	29	21.20	2	9.90
8-041-32	32	61	127	40	230	37	31.50	1	21.40

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	F inch	G inch	K inch	P inch	WLL lbs	Box Quantity	Mass lbs
8-041-07	1/4 - 5/16	0.59	1.18	0.35	2.36	0.39	4500	80	0.70
8-041-10	3/8	0.79	1.61	0.51	3.22	0.51	7100	40	1.30
8-041-13	1/2	0.98	2.05	0.59	4.02	0.63	12000	12	3.10
8-041-16	5/8	1.18	2.24	0.79	5.16	0.79	18100	10	4.90
8-041-20	3/4	1.49	2.87	0.91	5.75	0.91	28300	6	8.40
8-041-22	7/8	1.50	2.76	1.02	6.42	1.02	34200	5	10.10
8-041-26	1	1.81	3.94	1.26	8.07	1.14	47700	2	22.70
8-041-32	1-1/4	2.28	5.00	1.61	10.51	1.53	72300	1	44.10

No reduction on working load limit thanks to supporting wings which prevent chain link deformation.