


ROV Anchor Shackle with Safety Pin

- YOKE ROV shackles are designed specifically for ROV application.
- YOKE ROV shackles are manufactured with the highest quality steel available.
- YOKE ROV shackles are individually stamped with the safe working load.
- Shackles painted yellow for superior visibility and shackle pins are galvanised.
- Minimum Ultimate Load is 5 times the Working Load Limit.
- Maximum Proof Load is 2 times the Working Load Limit.

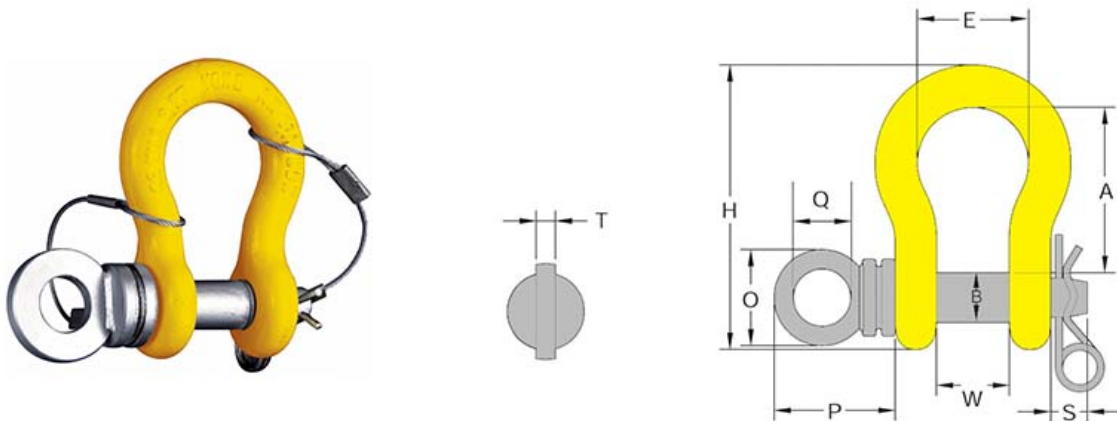

SPECIFICATIONS - Metric

Part Code	Size mm	WLL tonnes	A mm	B mm	E mm	H mm	O mm	P mm	Q mm	S mm	T mm	W mm	Mass kg
8-911-22	22	6.5	86	26	58	148	50	63	30	19	10	38	1.8
8-911-26	26	8.5	96	28	69	166	50	65	30	20	10	44	2.5
8-911-28	28	9.5	111	32	74	190	70	88	35	21	12	46	3.6
8-911-32	32	12.0	121	36	84	210	70	88	35	25	12	54	4.8
8-911-36	36	13.5	134	38	92	232	75	96	40	27	15	59	6.8
8-911-38	38	17.0	146	45	99	254	75	98	40	27	15	60	8.3
8-911-45	45	25.0	178	51	127	313	90	114	50	35	18	73	16.6
8-911-50	50	35.0	197	58	146	347	106	132	60	40	20	84	23.4

SPECIFICATIONS - Imperial

Part Code	Size inch	WLL lbs	A inch	B inch	E inch	H inch	O inch	P inch	Q inch	S inch	T inch	W inch	Weight lbs.
8-911-22	7/8	14,330	3.39	1.02	2.28	5.91	1.96	2.48	1.18	0.74	0.39	1.50	4.0
8-911-26	1	18,739	3.78	1.10	2.68	6.57	1.96	2.55	1.18	0.78	0.39	1.73	5.5
8-911-28	1-1/8	20,943	4.37	1.26	2.91	7.52	2.75	3.46	1.38	0.82	0.47	1.81	7.9
8-911-32	1-1/4	26,455	4.76	1.42	3.30	8.07	2.75	3.46	1.38	0.98	0.47	2.12	10.6
8-911-36	1-3/8	29,762	5.28	1.50	3.62	9.13	2.95	3.77	1.57	1.06	0.59	2.32	15.0
8-911-38	1-1/2	37,478	5.75	1.77	3.90	10.00	2.95	3.85	1.57	1.06	0.59	2.36	18.3
8-911-45	1-3/4	55,115	7.00	2.00	5.00	12.32	3.54	4.48	1.97	1.18	0.78	2.87	36.5
8-911-50	2	77,161	7.66	2.24	5.75	13.66	4.17	5.19	2.36	1.18	0.78	3.27	51.5