


## Yoke Grade 10 Eye Self Locking Hook

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

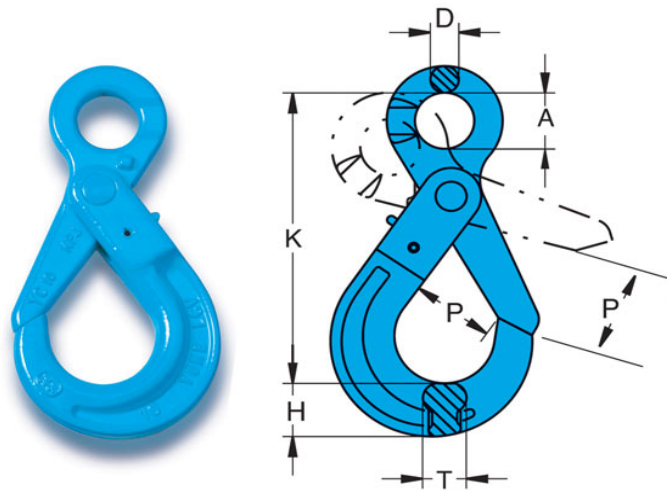

### METRIC SPECIFICATIONS

Part Code	Chain Size mm	WLL tonnes	A mm	D mm	H mm	K mm	P mm	T mm	Box Quantity	Mass Kg
X-025-07	7,8	2.5	25	11	24	136	34	20	20	0.8
X-025-10	10	4.0	32	13	30	167	44	26	12	1.5
X-025-13	13	6.7	40	16	39	207	51	30	6	3.0
X-025-16	16	10.0	50	21	49	252	60	36	4	5.8
X-025-20	20	16.0	60	23	65	290	70	53	2	10.0
X-025-22	22	19.0	70	24	63	319	80	49	2	12.5
X-025-26	26	26.5	80	25	69	343	99	56	1	15.0

### IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	WLL lbs	A inch	D inch	H inch	K inch	P inch	T inch	Box Quantity	Mass lbs
X-025-07	5/16	5500	0.98	0.43	0.94	5.35	1.34	0.78	20	0.8
X-025-10	3/8	8800	1.26	0.51	1.18	6.57	1.73	1.02	12	1.5
X-025-13	1/2	14700	1.57	0.63	1.53	8.15	2.00	1.18	6	3.0
X-025-16	5/8	22000	1.96	0.82	1.93	9.92	2.36	1.41	4	5.8
X-025-20	3/4	35200	2.36	0.90	2.56	11.41	2.75	2.08	2	10.0
X-025-22	7/8	41800	2.75	0.94	2.48	12.56	3.15	1.93	2	12.5
X-025-26	1	58400	3.15	0.98	2.72	13.50	3.89	2.20	1	15.0