
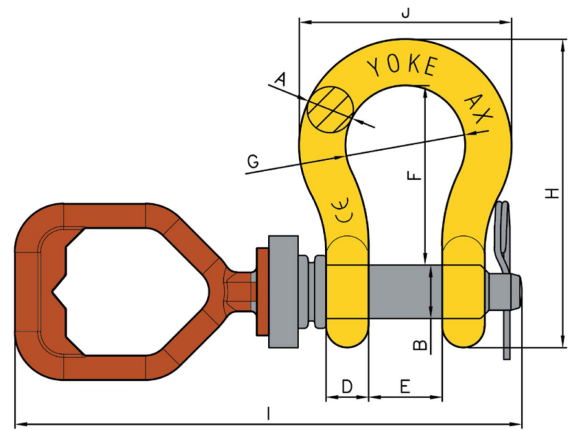


ROV Anchor Shackle with D-handle and safety pin

- Yoke ROV shackles with the addition of shackle pins with a D-link interface.
- The ROV shackle range can be offered from 6.5t to 35t.
- Working Load Limit clearly embossed on every shackle.
- Shackles painted yellow for superior visibility and shackle pins are galvanised.
- Minimum Ultimate Load is 5 times the Working Load Limit.
- Maximum Proof Load is 2 times the Working Load Limit.

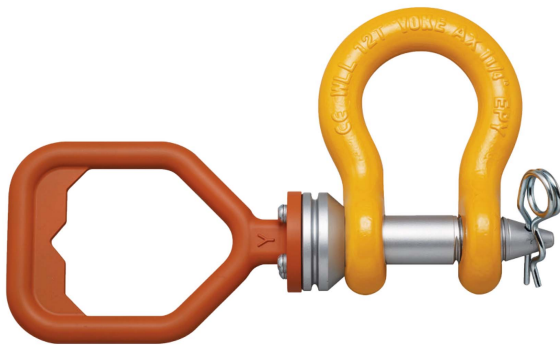

SPECIFICATIONS

Part Code	Size mm	WLL tonnes	Breaking Force tonnes	A mm	B mm	C mm	D mm	E mm	G mm	H mm	I mm	J mm	Mass Kg
8-951-22.DL	22	6.5	32.5	22	26	53	21.5	38	58	148	346	102	1.5
8-951-26.DL	26	8.5	42.5	26	28	61	23	44	68	166	355	120	2.6
8-951-28.DL	28	9.5	47.5	28	32	68	27	46	74	190	380	130	3.2
8-951-32.DL	32	12.0	60.0	32	36	76	29.5	54	84	210	393	148	4.2
8-951-36.DL	36	13.5	67.5	36	38	84	32	59	92	232	403	164	5.3
8-951-38.DL	38	17.0	85.0	38	45	92	35	60.5	97	254	415	175	7.3
8-951-45.DL	45	25.0	125.0	45	50	106	44	73	127	313	462	221	12.7
8-951-50.DL	50	35.0	175.0	50	57	122	50.8	83.5	146	347.5	486	247.7	18.1

Part Code	Size inches	WLL lbs	Breaking Force tonnes	A inch	B inch	C inch	D inch	E inch	G inch	H inch	I inch	J inch	Mass lbs.
8-951-22.DL	7/8	14,330	32.5	0.9	1.0	2.1	0.8	1.5	2.3	5.8	13.6	4.0	3.3
8-951-26.DL	1	18,739	42.5	1.0	1.1	2.4	0.9	1.7	2.7	6.5	14.0	4.7	5.7
8-951-28.DL	1 - 1/8	20,943	47.5	1.1	1.3	2.7	1.1	1.8	2.9	7.5	15.0	5.1	7.0
8-951-32.DL	1 - 1/4	26,455	60.0	1.3	1.4	3.0	1.2	2.1	3.3	8.3	15.5	5.8	9.2
8-951-36.DL	1 - 7/16	29,762	67.5	1.4	1.5	3.3	1.3	2.3	3.6	9.1	15.9	6.5	11.7
8-951-38.DL	1 - 1/2	37,478	85.0	1.5	1.8	3.6	1.4	2.4	3.8	10.0	16.3	6.9	16.1
8-951-45.DL	1 - 3/4	55,115	125.0	1.8	2.0	4.2	1.7	2.9	5.0	12.3	18.2	8.7	27.9
8-951-50.DL	2	77,161	175.0	2.0	2.2	4.8	2.0	3.3	5.7	13.7	19.1	9.8	39.8