


## DA Swivel Self Locking Hook

For a number of years William Hackett Lifting Products has strived to produce a range of DA Offshore Swivel Self Locking Hooks to meet the arduous working conditions of the offshore environment.

**The DA Range of Offshore Self Locking Hooks have been awarded type approval by DNVGL - DNVGL-ST-0378, certificate no. TAS000011K.**

- Complies with **NORSOK R-002: 2017**
- Tested and manufactured in accordance with **EN1677-3**
- Charpy certification will be supplied for each individual forged component part of the hook
- Charpy test of 42 joules (31ft. lbs.) at -20°C
- Material: Forged alloy steel, quenched and tempered
- Individually magnaflux crack detected
- Designed with recessed trigger which ensures the locking mechanism is protected against inadvertent opening due to entanglement with any obstruction during lifting
- Designed with ball bearing to allow the hook to rotate 360° under load
- Replacement Trigger kit assemblies are available

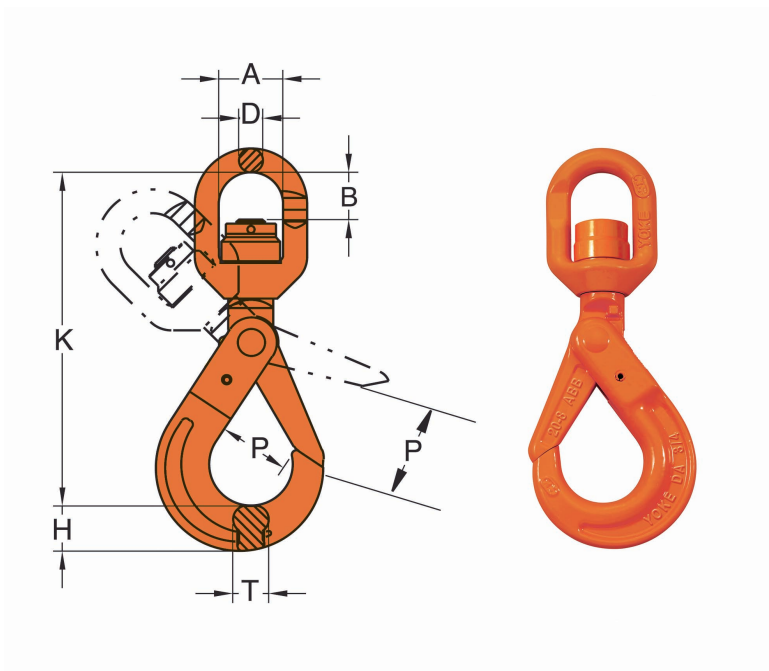

## SPECIFICATIONS - Metric

Part Code	WLL tonnes		A mm	B mm	D mm	H mm	K mm	P mm	T mm	Mass Kg
	5 : 1	4 : 1								
DA-027N-13W	5.3	6.7	61	50	23	39	283	51	30	5.0
DA-027N-16W	8	10	74	82	25	49	361	60	36	8.1
DA-027N-20	12.8	16	74	82	25	65	387	70	53	13.0
DA-027N-22	15.2	19	97	95	33	63	457	80	49	20.0
DA-027N-26	21.2	26.5	123	115	52	69	535	99	56	32.7
DA-027N-32	26.2	32.8	123	115	52	81	583	120	63	38.5

\*DA-027N-32 is not covered by DNV GL type approval certificate TAS000011K but is manufactured in accordance with the requirements of this type approval.

## SPECIFICATIONS - Imperial

Part Code	WLL lbs.		A inch	B inch	D inch	H inch	K inch	P inch	T inch	Mass lbs.
	5 : 1	4 : 1								
DA-027N-13W	11600	14700	2.40	1.97	0.91	1.54	11.14	2.01	1.18	11.0
DA-027N-16W	17600	22000	2.91	3.23	0.98	1.93	14.21	2.36	1.42	17.8
DA-027N-20	28000	35000	2.91	3.23	0.98	2.56	15.24	2.76	2.09	29.0
DA-027N-22	33500	41500	3.82	3.74	1.30	2.48	17.99	3.15	1.93	44.0
DA-027N-26	46500	58000	4.84	4.53	2.05	2.72	21.06	3.90	2.20	72.0
DA-027N-32*	57700	72000	4.84	4.53	2.05	3.19	22.95	4.72	2.48	85.0

\*DA-027N-32 is not covered by DNV GL type approval certificate TAS000011K but is manufactured in accordance with the requirements of this type approval.