


## Grade 8 Eye Self Locking Hook

All Grade 8 lifting components sold by William Hackett Chain Products comply fully with the relevant section of EN1677, they are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

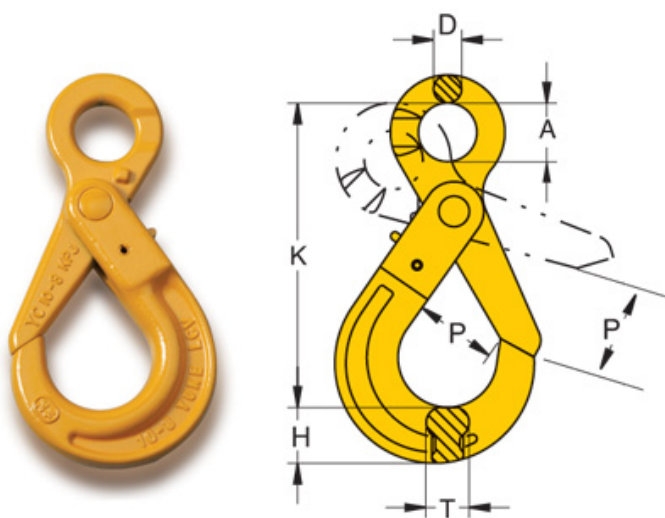

Part Code	Chain Size (mm)	K (mm)	P (mm)	A (mm)	D (mm)	T (mm)	H (mm)	M.B.L. (t)	Box Quantity	Weight Each (Kg)	CAD Files
8-025-10	10	167	44	32	13	26	30	12.6	12	1.4	<a href="#">Download</a>
8-025-13	13	207	52	40	16	30	39	21.2	6	2.9	<a href="#">Download</a>
8-025-16	16	252	60	52	21	36	49	32.0	4	5.7	<a href="#">Download</a>
8-025-20	20	282	90	64	23	48	62	50.0	2	8.5	<a href="#">Download</a>
8-025-22	22	319	80	70	24	49	63	60.0	2	12.5	<a href="#">Download</a>
8-025-26	26	343	99	80	25	56	69	84.8	1	14.5	<a href="#">Download</a>
8-025-28	28	401	120	90	28	63	81	99.2	1	24.9	<a href="#">Download</a>