




Yoke Grade 10 Component Connector EN1677-1+2

All Grade 10 lifting components sold by William Hackett Lifting Products comply fully with the relevant section of EN1677, ASTM A952/A and DIN PAS 1061. The grade 10 components are forged from alloy steel, they are crack detected following heat treatment and finally proof tested to 2.5 times working load. The full compliance of these components means that they can be used in chain slings certified to EN 818-4, for use in a temperature range of -40°C up to 200°C without reduction in working load limit.

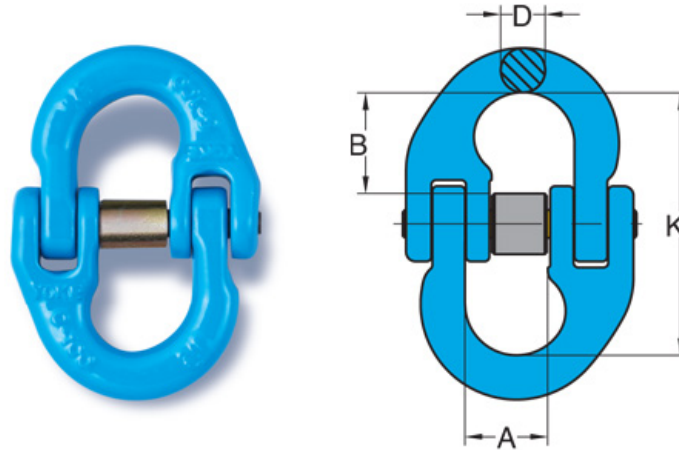

METRIC SPECIFICATIONS

Part Code	Chain Size mm	A mm	B mm	D mm	K mm	WLL tonnes	Box Quantity	Mass Kg
X-015-06	6	15	18	7	45	1.4	200	0.08
X-015-07	7/8	18	25	9	59	2.5	150	0.2
X-015-10	10	25	28	11	69	4.0	50	0.3
X-015-13	13	30	38	16	92	6.7	35	0.7
X-015-16	16	36	41	19	101	10.0	20	1.2
X-015-20	20	42	50	23	122	16.0	10	2.1
X-015-22	22	49	63	24	152	19.0	6	3.5
X-015-26	26	55	66	30	162	26.5	3	4.8

IMPERIAL SPECIFICATIONS

Part Code	Chain Size inch	A inch	B inch	D inch	K inch	WLL lbs	Box Quantity	Mass lbs
X-015-06	1/4	0.59	0.70	0.27	1.77	3000	200	0.17
X-015-07	5/16	0.70	0.98	0.35	2.32	5500	150	0.44
X-015-10	3/8	0.98	1.10	0.43	2.71	8800	50	0.66
X-015-13	1/2	1.18	1.49	0.62	3.62	14700	35	1.54
X-015-16	5/8	1.41	1.61	0.74	3.97	22000	20	2.64
X-015-20	3/4	1.65	1.96	0.90	4.80	35200	10	4.62
X-015-22	7/8	1.92	2.48	0.94	5.98	41800	6	7.71
X-015-26	1	2.16	2.59	1.18	6.37	58400	3	10.58

